



Adapter for Jefftron trigger installation



- apply glue on the green part of hair trigger adapter
- push adapter from top to bottom with no space between adapter and the trigger
- Right position is when top part of the adapter is in line with the top of the trigger and it is locked

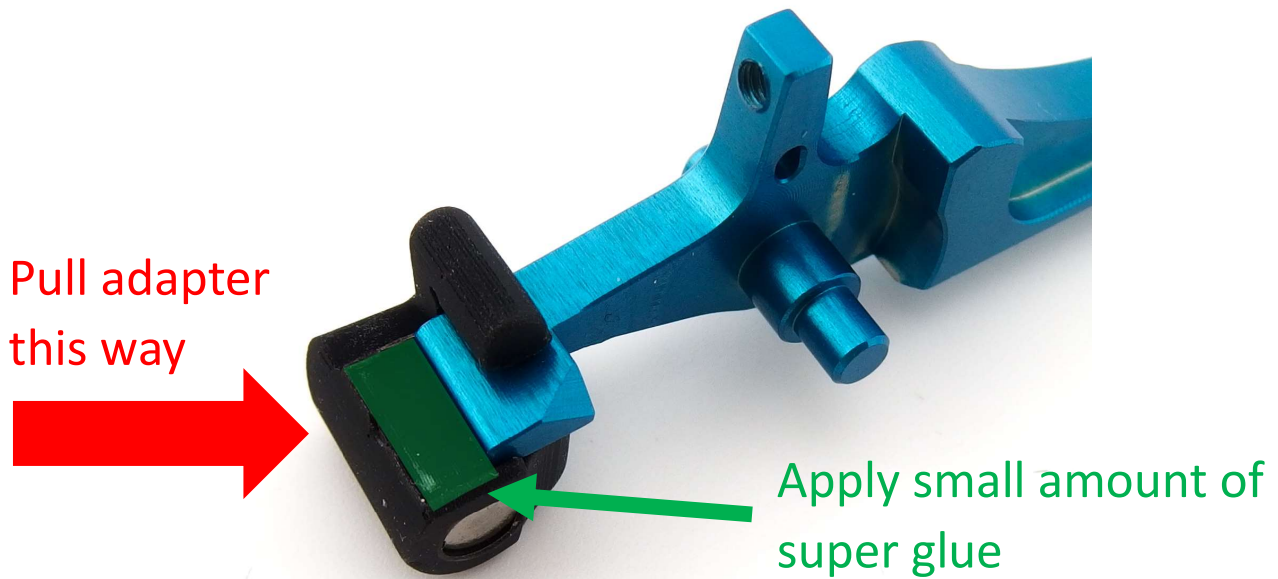

- Adapter in place over the Scylla-V2 etu

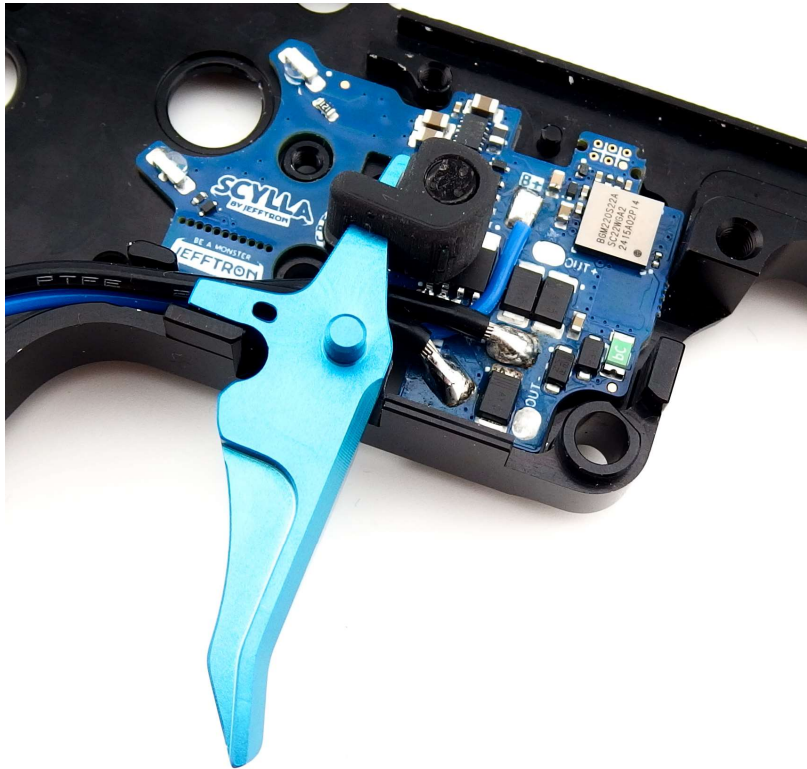


- Test if trigger with adapter has smooth travel inside the gearbox.

If not then:

1) Add 0,2 – 0,5mm high shim to the right side of trigger axis. You can use shims for the gears.

2) If the first step did not help, then you have to grind this edge on the right side of the gearbox. See picture below

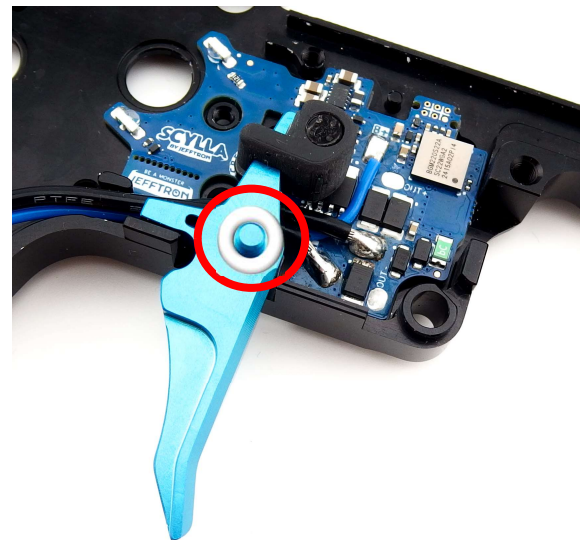

Adapter has to be installed by an expert. He must know how to disassemble the replica.

Warranty does not cover: water immersion, defects or damage from accident, misuse, abuse, wrong installation, bad handling, any modification by user.

Exclusion of liability: Manufacturer Ing. Filip Němec is not liable for any damages, injuries or accidents of any kind resulting from the use of this product in the airsoft gun.



www.jefftron.net