

Product Datasheet model uvex super OTG 9269 110

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- high-performance polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- tested according to STANAG 2920/4296
- set includes:
 - overspec with clear UV filter
 - uvex microfibre bag 9954 355
 - uvex microfibre cloth 9972 130
 - uvex eyewear case 9954 650

2. Technical Details Body

Front piece

Material	PC+PBT
----------	--------

Colour	black
--------	-------

Rivet

Material	brass, nickel-plated
----------	----------------------

Side arms

Material	PC+PBT/TPE
----------	------------

Colour	black, clear
--------	--------------

Marking

Manufacturer 's ID code	W
-------------------------	---

Applicable EN norm	166
--------------------	-----

Impact resistance	F (45 m/s)
-------------------	------------

Resistance to high speed particles at extremes of temperature	T
---	---

Conformity symbol	CE
-------------------	----

Tested acc. to STANAG	STANAG 2920
-----------------------	-------------

3. Technical Details Lens

Material	PC
----------	----

Thickness	2.1 mm at PD
-----------	--------------

Coating	uvex supravision excellence
---------	-----------------------------

Colour	clear
--------	-------

UV protection	UV400
---------------	-------

Replacement lens	9169255
------------------	---------

Marking according to EN


Filter	2C-1,2 (EN 170)
--------	-----------------

Manufacturer 's ID code	W
-------------------------	---

Optical class	1
---------------	---

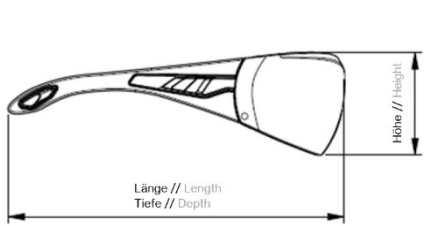


Impact resistance	F (45 m/s)
-------------------	------------

Resistance to high speed particles at extremes of temperature	T
---	---

Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	39g	
Dimensions (L x W x B) in approx. mm	  <p style="text-align: right;">picture only for reference</p>	
	161 x 157 x 58	
	Packing unit 1	Packing unit 2
EAN Code	4031101676821	4031101841373
Quantity in pcs.	1	54
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>	
	95 x 200 x 90	600 x 400 x 300
Net weight in approx. g	86	4,644
Gross weight in approx. g	100	6,075
Country of Origin	Germany	

5. Miscellaneous

Standards	EN 166 + EN 170 + STANAG 2920/4296
PPE Category	Category II